

### Heating

The choice of the contactor depends on the mechanical endurance (number of operations) and on the electrical heating load i.e. resistive elements, infra-red element, convectors.

### Choice of Contactors

The choice of contactor is dependant upon many parameters i.e. operating voltage, size of contacts, number of operations, ambient temperature, type of load supplied etc.


### Type of Load

Loads are categorised into various AC ratings, (AC1, AC2, AC3 etc.) and the higher the AC rating the more inductive the load becomes. All Hager contactor ratings are given at AC1, therefore they must be de-rated if used on other types of AC load.


### Heat Dissipation Inserts

The ambient temperature around a contactor can affect its life expectancy, therefore, we strongly recommend that heat dissipation inserts (LZ060) are fitted between all contactors and adjacent devices.

### Single Phase

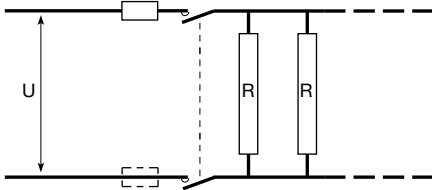


### Three Phase

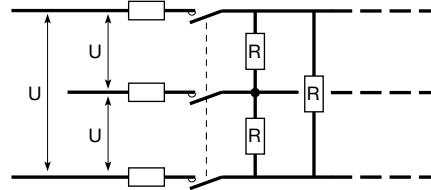


		Number of operations					
		100,000	150,000	200,000	500,000	1,000,000	
Max. load in kW	230V	16A	3	2.5	1.9	0.85	0.7
		25A	4.6	4	3	1.35	1
		40A	7.3	6.3	4.7	2.2	1.6
		63A	11.6	10	7.5	3.5	2.5
	400V	16A	8.9	8	5.8	2.8	2
		25A	13.8	12	8.6	4.3	3
		40A	22	18.5	14.385	6.3	5
		63A	35	30	22.6	10.2	7.6

### Motors

#### Single Phase 230V (AC3 or AC7b)

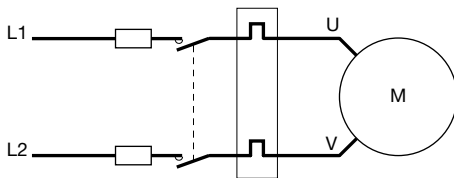

#### Three Phase 400V (AC3 or AC7b)

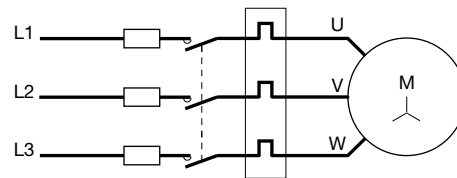

Maximum load in kW	Choice of Contactor According to control diagram			
	Single Phase with Capacitor 230V	Three Phase (AC3 or AC7) 400V	2 Wires	3 Wires
0.88			2 pole 25A	
2.6			2 pole 40A	
		2.6		3 pole 25A
		7.8		3 pole 40A
		10		3 pole 63A

### Requirements of Use

#### Influence of Working Temperature

Derating factor between 40°C and 50°C : 0.9

Example: Heating with convector

The maximum load of ESC225 is 4.6kW for 50,000 operations and for a temperature <40°C.

between 40°C and 50°C, the load is 4.6 x 0.9 i.e. 4.14kW

### Close Fitting

It is necessary to put a heat dissipation insert (reference LZ060) between each contactor.

Description		Modular contact						Auxiliary contact
Standard conformity		EN 61095						
Approvals		NF - VDE- IMQ - KEMA - RMC / CCC						
		Relay	Contactor	Relay	Contactor	Contactor	Contactor	Contactor
Number of modules		1		2		3		½
Thermal current I <sub>th</sub> (40°C)		16A	25A	16A	25A	40A	63A	6A
Rated frequency		50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Rated insulation voltage (Ui)		250V	250V	440V	440V	440V	440V	250V
Rated impulse withstand voltage (U <sub>imp</sub> )		4kV	4kV	4kV	4kV	4kV	4kV	4kV
Protection Degree		2	2	2	2	2	2	2
<b>Rated Operating currents and power ratings in AC</b>								
AC-1 / AC-7a	Rated operational currents I <sub>e</sub>	16A	16A	16A	25A	40A	63A	-
	Rated operational power 230V	3kW	4.6kW	3kW	4.6kW	7.3kW	11.6kW	-
	400V	-	-	8.9kW	13.8kW	22kW	35kW	-
AC-3 / AC-7b	Rated operational currents I <sub>e</sub>	5.5A	8.5A	5.5A	8.5A	25A	32A	-
	Rated operational power 230V	570W	880W	570W	880W	2.6kW	3.3kW	-
	400V	-	-	1.7kW	2.6kW	7.8kW	10kW	-
AC-12	Rated operational currents I <sub>e</sub> @ 230V	-	-	-	-	-	-	6A
AC-15	Rated operational currents I <sub>e</sub> @ 230V	-	-	-	-	-	-	2A
<b>Mechanical and Electrical Endurances</b>								
Mechanical endurance	Number of operations	1,000,000	1,000,000	1,000,000	1,000,000	1,000,000	1,000,000	1,000,000
Electrical endurance @ I <sub>e</sub> AC7a (AC12 for aux contact)	Number of operations	60,000	60,000	60,000	60,000	60,000	60,000	60,000
<b>MCB Protected short-circuit withstand</b>								
Prospected short-circuit current	rms	1kA	3kA	1kA	3kA	3kA	3kA	1kA
Associated protection		MCB C16-6kA	MCB C25-6kA	MCB C16-6kA	MCB C25-6kA	MCB C40-10kA	MCB C63-10kA	6A 10x38 gG Fuse
<b>Power dissipation</b>								
Power dissipation per current path		1W	1.5W	1W	1.5W	3.2W	5W	0.4W
<b>Magnetic system for Eco and standard contactor</b>								
Pick-up		2.2W	2.2W	2.8W	2.8W	5W	5W	-
Coil consumption		2.2W	2.2W	2.8W	2.8W	5W	5W	-
Closing delay		25ms	25ms	25ms	25ms	25ms	25ms	-
Opening delay		15ms	15ms	15ms	15ms	20ms	20ms	-
<b>Connection</b>								
Main contact cable section	Rigid	1...10mm <sup>2</sup>	1...10mm <sup>2</sup>	1...10mm <sup>2</sup>	1...10mm <sup>2</sup>	4...25mm <sup>2</sup>	4...25mm <sup>2</sup>	1...6mm <sup>2</sup>
	Flexible	1...6mm <sup>2</sup>	1...6mm <sup>2</sup>	1...6mm <sup>2</sup>	1...6mm <sup>2</sup>	4...16mm <sup>2</sup>	4...16mm <sup>2</sup>	1...6mm <sup>2</sup>
Main contact connection screw	Type	M3.4	M3.4	M3.4	M3.4	M5	M5	M3.4
	Posidrive	PZ2	PZ2	PZ2	PZ2	PZ2	PZ2	PZ2
	Max. tight. torque	1.2Nm	1.2Nm	1.2Nm	1.2Nm	2Nm	2Nm	1.2Nm
Coil connection cable section	Rigid	1...10mm <sup>2</sup>	1...10mm <sup>2</sup>	1...10mm <sup>2</sup>	1...10mm <sup>2</sup>	1...10mm <sup>2</sup>	1...10mm <sup>2</sup>	-
	Flexible	1...6mm <sup>2</sup>	1...6mm <sup>2</sup>	1...6mm <sup>2</sup>	1...6mm <sup>2</sup>	1...6mm <sup>2</sup>	1...6mm <sup>2</sup>	-
Coil connection screw	Type	M3.5	M3.5	M3.5	M3.5	M4	M4	-
	Posidrive	PZ2	PZ2	PZ2	PZ2	PZ2	PZ2	-
	Max. tight. torque	1.2Nm	1.2Nm	1.2Nm	1.2Nm	1.5Nm	1.5Nm	-
<b>Working temperature</b>								
		-10°C to +50°C						
<b>Storage temperature</b>								
		-40°C to +80°C						

