

IS 3360 MX Highbay

DALI-2 Input Device - surface, sq.
EAN 4007841 057374
Article number 057374



infrared sensor 360°



18 m



IP54



2 - 1000 lux



ideal 4 - 14 m



energy saving

5 years

manufacturer's warranty
steinel.de/garantie



CE

Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version. DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems (e.g. LiveLink).

Technical specifications

Dimensions (L x W x H)	65 x 95 x 95 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Bus
With remote control	No
Version	DALI-2 Input Device - surface, sq.
PU1, EAN	4007841057374
Type	Motion detectors
Application, place	Indoors, Outdoors
Application, room	high-bay warehouse, sports hall, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Package content	1
Installation	Surface wiring, Ceiling

Mounting height	4,00 – 14,00 m
Mounting height max.	14,00 m
Optimum mounting height	12 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	Ø 14 m (154 m²)
Reach, tangential	Ø 36 m (1018 m²)
Switching zones	1416 switching zones
Cover material	shrouds
Twilight setting	2 – 1000 lx
Basic light level function	No
Main light adjustable	No

IS 3360 MX Highbay

DALI-2 Input Device - surface, sq.
EAN 4007841 057374
Article number 057374



Technical specifications

IP-rating	IP54	Twilight setting TEACH	No
Ambient temperature	from -20 up to 50 °C	Constant-lighting control	No
Material	Plastic	Interconnection	Yes
Mains power supply	12 – 22,5 V	Type of interconnection	Master/slave
Switching output 1, floating	No	Interconnection via	DALI bus
Power supply, detail	DALI bus	Max. Current consumption according to IEC 62386-101	24 mA
Number of Dali users	3	Typical current consumption at 16V input voltage	5 mA
Steuerausgang, Dali	Addressable/slave	Max. Current consumption at 10V input voltage in regular operation	7 mA
With bus coupling	Yes	Product category	Motion detector
Technology, sensors	passive infrared, Light sensor		

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 056711	Black cover for IR-sensors


IS 3360 MX Highbay

DALI-2 Input Device - surface, sq.

EAN 4007841 057374

Article number 057374

Detection Zone

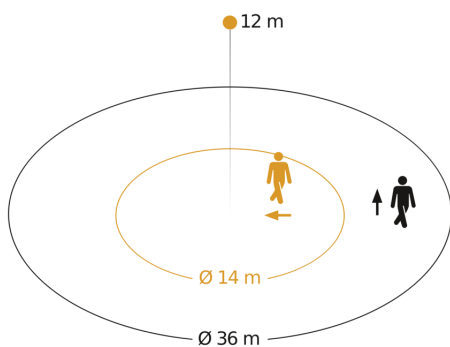


Possible mounting height: 4,00 m – 14,00 m

Orange: radial

Black: tangential

Dimension Drawing

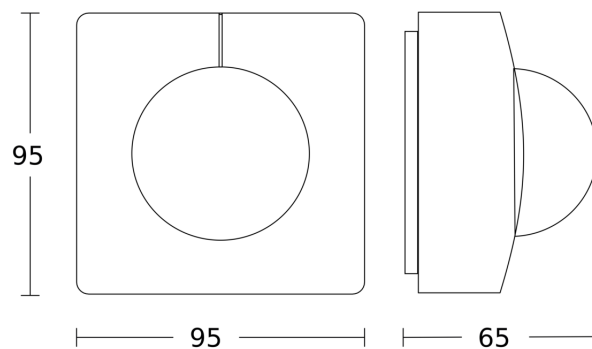

Circuit diagram

