
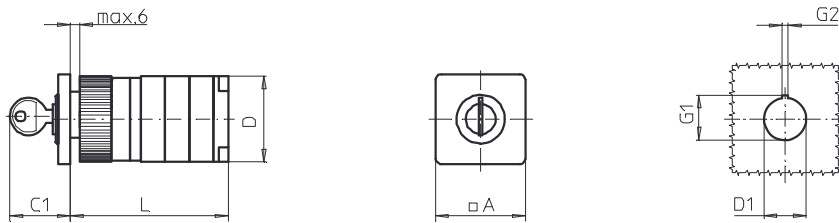


# Front Mounting Switches

# sälzer



**Product line**  
**P200**


**Front mounting switch**  
Key operated

**Single hole mounting**  
ø 22,5 mm

**S001. (IP40)**

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I <sub>e</sub>	Operational power at 380–440 V		
			AC-21A A	AC-23A kW	AC-3 kW	
Rotary Cam Switches Switching angle 30°/45°/60°/90°	1 ... 16	P200	20 25	7,5 11	5,5 7,5	<b>P220 - 61 ... - S001.</b> <b>P225 - 61 ... - S001.</b>

The dot in the order code number of the complete mounting form/operator module must be replaced by the classification letter which identifies the key removable positions:

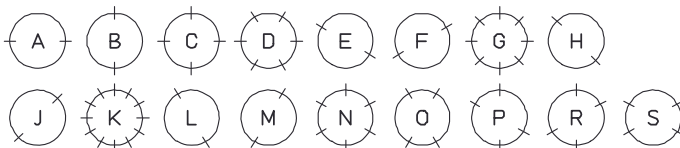

Lines indicate the key removable positions.

SMD modules for basic switch A01				
Mounting form module for S001.		P200		<b>BFA2 - S</b>
operator module 48 x 48 mm, mounting form S001.				<b>2AS1-001.</b>
Escutcheon black, Ronis lock C001, 2 keys				
Legend plate silver, operator module S001.				<b>FAS2 - .... (FA number)</b>
Further lock types and security lock on request.				

Type	A	C1	D	D1	G1	G2	L with ... stages (max. 8)							
							1	2	3	4	5	6	7	8
P220	48	33	44	22,5	24,2	3,2	66	79	92	105	118	131	144	157
P221	48	33	44	22,5	24,2	3,2	69,5	86	102,5	119	135,5	152	168,5	185
P225	48	33	46	22,5	24,2	3,2	70	85	100	115	130	145	160	175
P226	48	33	46	22,5	24,2	3,2	73,5	92	110,5	129	147,5	166	184,5	203